

SWITCH PRO

- EXTENSION SWITCHING BOX FOR SYSCAL PRO AND ELREC PRO UNITS
- Able to drive 24 to 192 electrodes
- Dedicated to extended 2D or 3D arrays


Practical: The electrodes numbering is done automatically from the unit ; two push buttons allow to select the first electrode number to be used, to make it compatible with your SYSCAL Pro Switch unit, and with other SWITCH Pro boxes ; The unit has its own screen allowing to see the electrodes number currently used together with the battery level.




SWITCH Pro box

Flexibility: Several SWITCH Pro boxes can be connected together for large 2D or 3D acquisitions (up to 192 electrodes can be switched per SWITCH Pro unit with a maximum of 2000 electrodes for the full system).

With a SYSCAL Pro unit dedicated to environmental applications where small spacing between electrodes are used (5 meters for example), some switch cables can be directly connected to the SWITCH Pro box to extend the array. The following example describes a SYSCAL Pro Switch 48 with a SWITCH Pro 48 box:

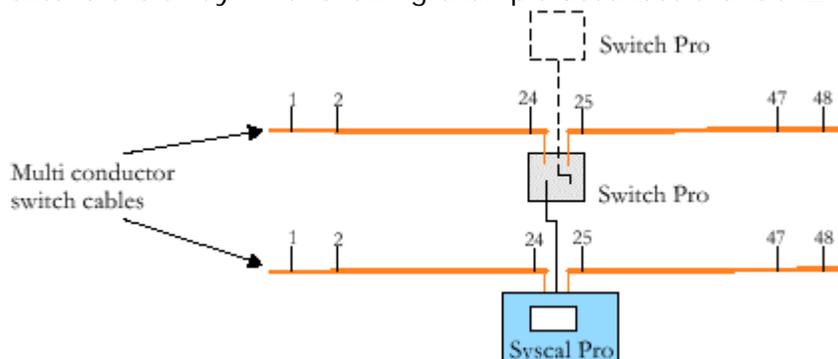


In case of large spacing between electrodes or in case of using an ELREC Pro dedicated to mineral exploration (where spacing of about 20 meters between electrodes is used), some additional termination strip box(es) with standard wires can be used to keep a reasonable weight of the full system ; moreover these standard mono conductor wires between strip boxes and metallic stakes, can be easily removed in the field, in case of trouble. The following example describes an ELREC Pro with a SWITCH Pro 48 box and a termination strip box:

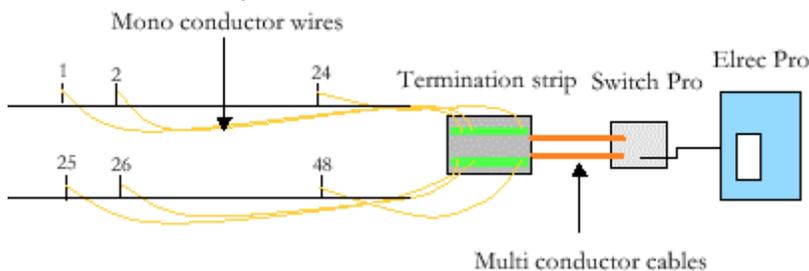

Termination strip box for SWITCH Pro 48

In case of the operator needs to measure more than 10 depth levels, the use of a SWITCH Pro box is particularly adapted. Indeed, without moving the electrodes, it's possible to switch the electrodes to measure in a first time a set of 10 dipoles and in a second time another set of dipoles and so on... then, the electrodes can be moved to go on the profile. The following example describes an ELREC Pro with a SWITCH Pro 24 box and a termination strip box:

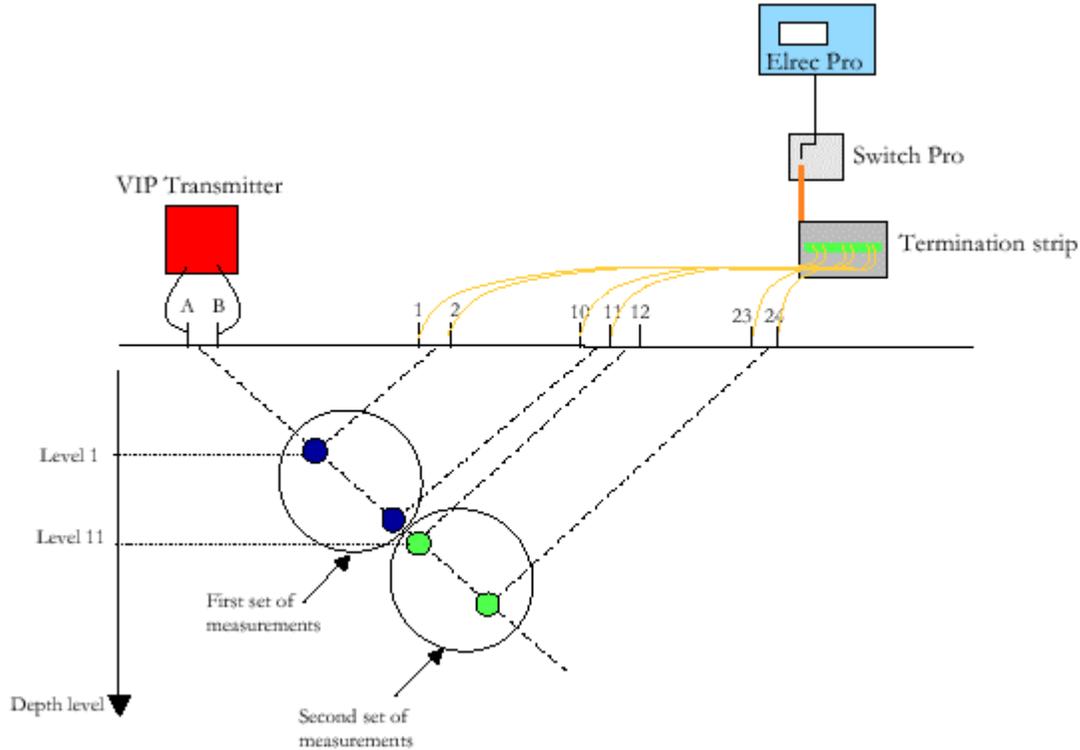

Features

GENERAL SPECIFICATIONS:

- Continuous battery reading
- Power supply: internal rechargeable 12V, 7.2 Ah battery; optional external 12V standard car battery can be also used
- Weather proof
- Shock resistant fiber-glass case
- Operating temperature: -20 °C to +70 °C
- Dimensions: 31 x 21 x 21 cm
- Weight: 3 kg